
# Wiring method for lighting module in distribution box

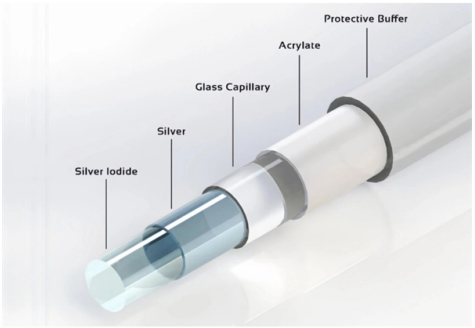


## Overview

Microsoft Word The MDB takes power and lighting circuits from a distribution board and extends them out onto the ceiling space. The MDB generally comprises.

## Key Takeaways

Lighting module distribution boxes are typically wired using a modular home-run system with integrated bus cables, SPN circuits, and clearly marked conductors for each output port.

### Power Input and Home-

### Run Cabling

The distribution box receives power from a main distribution board via a single multi-core home-run cable. For a 6-port box, an 18-core cable is used; for a 9-port box, a 27-core cable is typical. Each conductor is marked at 150mm intervals to correspond with its output port, facilitating identification and connection to Light Control Modules (LCMs) or luminaires.

The home-run cable may also include an integral bus cable (shielded or unshielded) for communication with lighting controllers or building management systems.



© 2026 ALFA PRO COMMUNICATION SYSTEMS (Pty) Ltd - All rights reserved

## Circuit Configuration

Distribution boxes can be configured in radial or ring circuits, depending on the installation requirements.

## Each SP

N (Single Pole + Neutral) circuit is connected to the corresponding output port. For dual-circuit switching, some systems allow separation of circuits A and B by removing copper links and wiring the switch returns to terminals SW(A) and SW(B),. Load balancing is essential, especially for LED or high-power lighting systems, to prevent voltage drops and ensure even distribution.

## Modular Connections

Modern systems, such as the Vitesse Modular or flex7 boxes, use modular connectors for both power and control signals. Starter modules provide 4-pole connections for standard luminaires, while extender modules allow additional outputs. Control inputs and outputs are pluggable, enabling easy expansion or replacement without rewiring the entire system.

Flexible cords from sensors or switches are connected to dedicated terminal blocks, not the main power terminals, to maintain safety and compliance.

## Grounding and Mounting

Proper grounding is critical. The distribution box should be mounted on a wall, ceiling, cable tray, or suspended via threaded rods, with the home-run cable armoring securely anchored. Metal brackets often provide both structural support and grounding points.

Ensure all circuits are phase balanced and that the system complies with local electrical codes, such as BS7671 in the UK.

## Bus Integration and Control

For systems with integrated bus communication, a separate bus cable runs from the distribution box to the lighting area controller. This allows centralized control, dimming, and automation. Extender cables with integral bus lines connect to LCMs, enabling both power and signal distribution in a single run.

## Summary

Use a multi-core home-run cable with marked conductors for each port. Configure circuits as radial or ring, ensuring load balance. Connect flexible cords for sensors to dedicated terminal blocks.

Use modular starter and extender modules for easy expansion. Ensure proper grounding, mounting, and compliance with electrical standards. Integrate bus cables for control and automation where applicable.

*© 2026 ALFA PRO COMMUNICATION SYSTEMS (Pty) Ltd - All rights reserved*

Following these methods ensures a safe, modular, and expandable lighting distribution system suitable for modern commercial or residential installations.

## Article Content

Microsoft Word

The MDB takes power and lighting circuits from a distribution board and extends them out onto the ceiling space. The MDB generally comprises 6 or 9 SPN circuits and may include a data BUS input.

How to Wire a Lighting Circuit: Loop-In and Junction Box Methods ...

A complete UK guide to wiring a domestic lighting circuit from the consumer unit — cable sizing, MCB selection, loop-in method, junction box method, switch drops, two-way switching, and

469212C10 issA

Drill a 20mm dia hole in the base of the lighting trunking at the position where cable entry to the LDS box will be.Drill second hole 6mm dia clear to line up with the xing hole at the non terminal end of the

Modular LCM Installation Guide | PDF | Electrical Connector ...

It supports connections for 2 to 16 luminaires and includes specific modules for different output configurations. The installation guide emphasizes safety precautions, wiring instructions, and

Explanation of different domestric electric lighting wirings

Here we outline the two most common ways to meet that requirement - the loop-in wiring and the radial wiring (also referred to as ''junction box) installations. Picture 1 shows the basic principle of wiring a

How to wire a DB – Distribution Board Wiring – Mechatrofice

Through the MCB phase lines are distributed to electrical wiring for lighting, fixed devices, and power distribution points. This type of arrangement is the commonly used method of distribution

How To Do The Wiring Work Inside The Distribution Box

The wiring work inside the Power distribution cabinet is a very important process in the production of the distribution box. So how to do the wiring work inside the

Lighting

© 2026 ALFA PRO COMMUNICATION SYSTEMS (Pty) Ltd - All rights reserved

Klik marshalling boxes are used in conjunction with Klik 3 and 4 pin plugs to connect luminaires within an area. The Klik marshalling box can be separated into two independently switched circuits.

What are the requirements for lighting distribution box wiring?

In short, when wiring the lighting distribution box, appropriate wires and terminals should be selected, and the wiring should be carried out in strict accordance with the national electrical safety standards.

Wiring Diagram Lighting Circuit Joint Box Method

Student training aid for the connections required to wire a lighting circuit using the joint box method. Video explains the connection required within the th...

How To Install Modular Wiring Systems: Step-By-Step

Modular wiring is also future-proofed, so should the layout of the building change at any time, the system can easily be modified. So how easy is it

Wiring of the Distribution Board with RCD (Single Phase

The above mentioned electrical wiring accessories and protective devices are used to control and distribute electric supply (safely to connected electrical appliances)

How to Wire a Junction Box for Lighting: Circuit Diagram and Step-by ...

Learn about the wiring diagram for a junction box lighting circuit. Understand how junction boxes are used to connect and distribute electricity for lighting fixtures in your home or building.

Size determination, installation method and wiring mode of distribution ...

(1) Wiring method of distribution box 1) Generally, the incoming line of power distribution box adopts five wire system, i.e. three phase lines a, B and C (generally yellow, green and red), one zero line (light

Wiring a Lighting Junction Box: A Step-by-Step Guide

Learn how to properly wire a lighting junction box for safe and efficient electrical connections. Step-by-step guide for professional results.

Lighting Circuit Wiring Diagrams | PDF | Switch | Wire

Lighting Circuit Wiring Diagrams The document describes 14 lighting circuits and provides details on circuit components, switch configurations, and complexity levels. It also includes sections on security

Wiring Installation for lighting & Power Points

*© 2026 ALFA PRO COMMUNICATION SYSTEMS (Pty) Ltd - All rights reserved*

Below procedure is mainly useful for both domestic and commercial purposes. Method Of Electrical Wiring Installation for Lighting & Power Before starting the electrical wiring for the lighting

Microsoft Word

1.5: Lighting Systems (Light Control Module Application) This comprises power distribution to Light Control Modules (LCM) with an integral signal BUS cable throughout. From the Master Distribution

## Contact Us

Continue your research online:

Website: https://alfa-pro.co.za
Technical inquiry: https://alfa-pro.co.za/contact.html

This document is for preliminary research. Verify specifications against current standards, product documentation and project requirements.

© 2026 ALFA PRO COMMUNICATION SYSTEMS (Pty) Ltd - All rights reserved